accuc@ld

VT65M7CSS



33.25" x 23.75" x 23.5" (H x W x D)

Commercial built-in medical all-freezer capable of -25° C operation in complete stainless steel

Highlights:

Flexible design allows built-in or freestanding use

Complete construction in stainless steel for durability with modern luxury

Functional elegance with a sturdy towel bar handle in brushed stainless steel

Product Features:

| Commercially approved | ETL-S listed to NSF-7 Standards for use in commercial establishments | |
|-----------------------------------|--|--|
| Complete stainless steel exterior | Durable design with lasting elegance | |
| Professional towel bar handle | A curved stainless steel handle provides generous room for a comfortable grip | |
| Slim undercounter dimensions | Less than 24 inches wide to fit tight spaces | |
| Built-in capable | Make the best use of space by installing your appliance under the counter and flush with other cabinets | |
| Fully finished cabinet | Allows the freezer to be used freestanding | |
| -25° C capable | Low temperature operation is ideal for vaccine, pharmaceuticals, and other temperature sensitive materials | |
| Manual defrost | No temperature fluctuations with a manual defrost system that keeps the cold inside | |
| Three interior storage baskets | Conveniently organize your items while keeping the temperature stable when the door is opened | |




accuc@ld

VT65M7CSS Specifications:

| Overview | | | |
|---|--------------------------------------|--|--|
| Height of Cabinet | 33.25" (84 cm) | | |
| Width | 23.75" (60 cm) | | |
| Depth | 23.5" (60 cm) | | |
| Depth with Handle | 24.75" (63 cm) | | |
| Depth with door at 90° | 45.5" (116 cm) | | |
| Capacity | 3.5 cu.ft. (99 L) | | |
| Defrost Type | Manual | | |
| Door | Stainless Steel | | |
| Cabinet | Stainless Steel | | |
| US Electrical Safety | UL | | |
| Canadian Electrical Safety | ULC | | |
| Sanitation | ETL-S | | |
| Amps | 1.3 | | |
| Voltage/Frequency | 115 V AC/60 Hz | | |
| Weight | 105.0 lbs. (48 kg) | | |
| Shipping Weight | 110.0 lbs. (50 kg) | | |
| Estimated Time to Ship | 2 to 4 days | | |
| Parts & Labor Warranty | 1 Year | | |
| Compressor Warranty | 5 Years | | |
| Freezer | | | |
| Door Swing | RHD | | |
| Reversible | Factory Reversible | | |
| Height Adjustable | 1 | | |
| Interior Height | 24.25" (62 cm) | | |
| Interior Width | 17.75" (45 cm) | | |
| Interior Depth | 16.5" (42 cm) | | |
| Thermostat Type | Dial | | |
| Fan Type | Exterior | | |
| | | | |
| Refrigerant Type | R134a | | |
| Refrigerant Type Refrigerant Amount | R134a 2.7 oz. | | |
| | | | |
| Refrigerant Amount | 2.7 oz. | | |
| Refrigerant Amount High Side PSI | 2.7 oz. 235.0 | | |
| Refrigerant Amount High Side PSI Low Side PSI | 2.7 oz. 235.0 70.0 | | |
| Refrigerant Amount High Side PSI Low Side PSI Level Legs | 2.7 oz. 235.0 70.0 4 | | |
| Refrigerant Amount High Side PSI Low Side PSI Level Legs Interior Drawers | 2.7 oz. 235.0 70.0 4 Yes | | |

| Compressor Step Depth | 5.5" (14 cm) |
|-----------------------|----------------|
| Temperature Range | -12°C to -25°C |

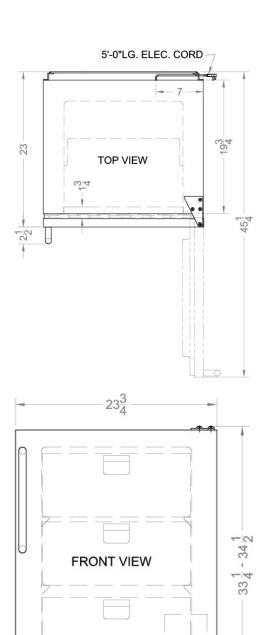



ELEC. CORD