

24" Electric Air Vented Dryer





GENERAL PROPERTIES	
Dryer Type	Electric Air, Vented
Style	Front Load
Capacity	3.7 cu. ft.
Dry Load Capacity	15.5 lbs.
Control Type	Digital Display (White LED)
Connectivity	_
Matching Washer	BWM7200X

FEATURES	
Steam Dryer	_
OptiSense (Sensor Drying)	Yes
Bi-Directional Drum Action	Yes
Interior Drum LED Lighting	_
Clean Filter Indicator	Yes
Program Follower	Yes
Delay Start Time (Ending In)	0-24 Hours
Remaining Time Indicator	Yes
End of Cycle Buzzer (On / Off)	Yes
Child Lock	Yes

PREMIUM TECHNOLOGY



STACKING KIT INCLUDED WITH DRYER

Beko washer & dryers don't require any extra hardware to stack and start saving space.



GENTLE DRYING

These unique baffles within the dryer drum gently separate items as they dry for a more even, wrinkle-free result.



ANTICREASING

Gentle drum action separates clothing throughout the drying cycle to ensure ready-to-wear, wrinkle-free results.



24" Electric Air Vented Dryer

FEATURES CONTINUED	
ProSmart Inverter Motor	No
Silence Level	67 dBA
Glass Door	Yes
Adjustable Leveling Legs	4
Stackable	Yes

EFFICIENCY	
Energy Efficiency Class	_
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption (kWh)	260 kWh/year

CYCLES	
Number of Cycles	15
Cottons / Normal	Yes
Permanent Press	Yes
Heavy Duty	Yes
Sports Wear	Yes
Mixed Fabric	Yes
Bedding	Yes
Sanitize	Yes
Towel	Yes
Wrinkle Free	Yes
Delicates	Yes
Wool	Yes
Quick Dry (30 Min.)	Yes
Air Fluff / No Heat	Yes
Timed Dry	Yes, 10-160 Min. (High and Low Temp)

OPTIONS	
Dry / Time Level	Yes
Remote Control	_

MATERIALS AND FINISHES	
Drum Material	Galvanized Finish
Cabinet	White
Door Rim	Silver
Cycle Selector Knob	Silver

TECHNICAL INFORMATION	
Energy Source	Electric
Total Power (W)	2,000 - 2,400 W
Volts / Frequency	208/240V / 60Hz
Rated Amps (A) / Min. Circuit Breaker	10 A / 15 A
Power Cord	Included, 4-Wire (NEMA 14 -30R)
Power Cord Length	4.9 ft.
Door Hinge	Right Side (Not Reversible)


DIMENSIONS & WEIGHT	
Product Dimensions (HxWxD) (in)	33 ¹¹ / ₁₆ x 23 ¹ / ₂ x 23
Product Depth with Door Open (in)	40 7/8
Product Height When Stacked (in)	68
Required Cutout Size (HxWxD) (in)	36 x 24 ³ /4 x 25
Carton (H x W x D) (in)	35 x 26 ¹ /5 x 28
Product Weight (lbs)	73.85
Shipping Weight (lbs)	81.6


ACCESSORIES (INCLUDED) Stacking Kit Yes (2979540100)


WARRANTY	
Entire Appliance	2 year Limited Warranty (Parts & Labor)
Circuit Board and Dryer Drum	5-year Limited Warranty (Parts Only Years 3-5)



24" Electric Air Vented Dryer

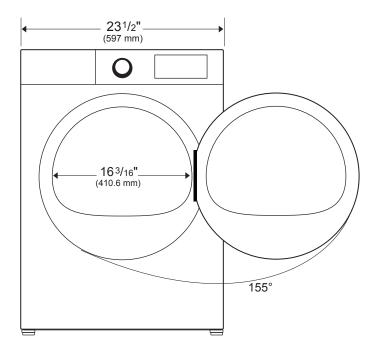

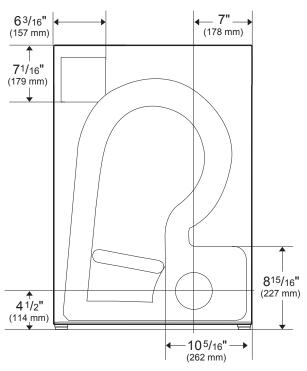

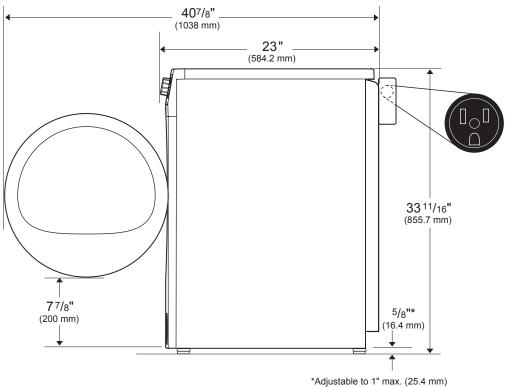



STACKING KIT

2979540100


Included with dryer purchase. Easily stack your units and save space without additional parts.



24" Electric Air Vented Dryer

Clearances for Undercounter Installation



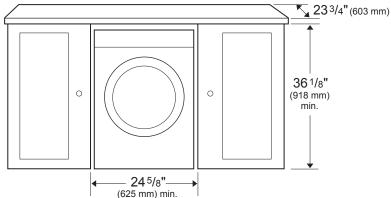


Required Minimum Clearances: (Stand Alone, Side by Side, or Stacked)

Washer Vented Dryer
Top: 1"(25 mm) Top: 1"(25 mm)
Sides: 1/2"(13 mm) Sides: 3/16"(4 mm)
Rear: 1/2"(13 mm) Rear: 4"(101.6 mm)
Front: 1/2"(13 mm) Front: 3/16"(5 mm)

Clearances for Undercounter Installation

Both Washer and Vented Dryer

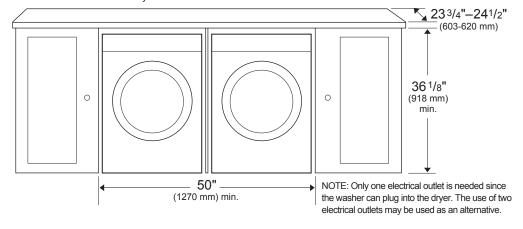

Closet Door Ventilation Requirement

Washer

A louver having minimum 23 in2 (148 cm2) air opening located at 3 in (7.62 cm) distance from the bottom of closet door.

Vented Dryer:

A louver having minimum 46 in2 (297 cm2) air opening located at 3 in (7.62 cm) distance from the top of closet door.


Heat Pump Dryer:

Closet door must have 2 openings, one located 3.2 inches (8 cm) from bottom of door having a minimum area of 16 in2 (103 cm2) and the other one located 3 inches (7.5 cm) from top of door having a minimum area of 46 in2 (294 cm2).



24" Electric Air Vented Dryer

Stacked Installation – Washer and Vented Dryer

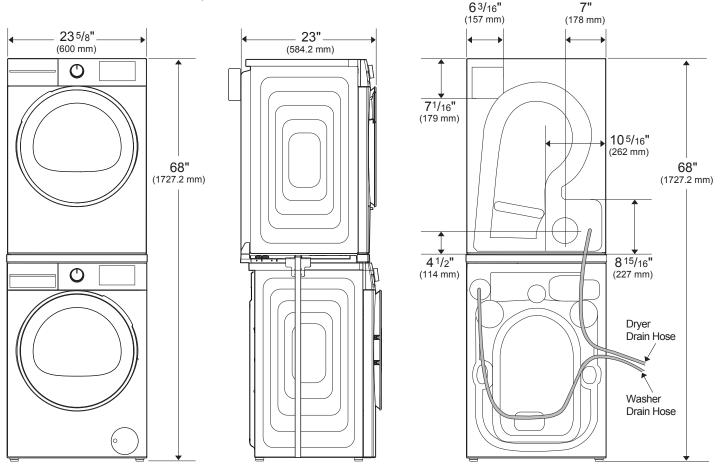


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website, www.BekoAppliances.com, or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.


beko

24" Electric Air Vented Dryer

Stacked Installation in Closet or Enclosed Space – Washer and Vented Dryer

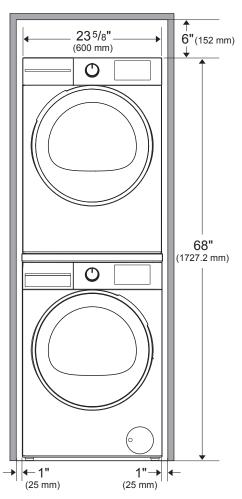

NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

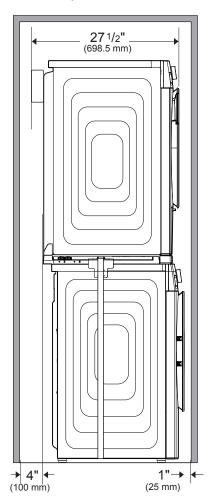

\$\frac{1}{3}\text{"(76 mm)}\$
\$\frac{1}{48 \text{ in.}^2}\$
\$\frac{1}{31000 \text{ mm}^2}\$
\$\frac{1}{3}\text{"(76 mm)}\$
\$\frac{1}{3}\text{"(76 mm)}\$

NOTE: The front of the closet must have two unobstructed air openings for a combined minimum total area of 72 sq.in. (465 sq.cm) with a minimum clearance of 3 in. (76 mm) at the top and bottom. A slatted door with equivalent space clearance is acceptable.

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website, www.BekoAppliances.com, or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.