

Ideal Hot & Cold Tap with Filtration Available Late 2021

IHTF-D-PSS



Polished
Stainless Steel

IHTF-D-MSS



Matte
Stainless Steel

IHTF-D-GSS



PVD Gun Metal Gray™
Stainless Steel

IHTF-D-BSS



PVD Satin Black
Stainless Steel

IHTF-D-YSS



PVD Brushed Gold
Stainless Steel
Limited Edition

IHTF-D-RSS



PVD Polished Rose Gold
Stainless Steel
Limited Edition


Specifications

Ideal Hot & Cold Tap

Solid 316L Machined Stainless Steel Construction
Forward rotating COMFORTFEEL™ lever handles
Hot side lever is spring loaded for automatic shutoff 1/4 turn
Ceramic disk cartridges
Spout rotates 360°
Laminar Ideal Flow®
Thermally insulated spout
Provides filtered (not included), hot water, 208°F max temperature
Provides filtered (not included), cold water (not chilled)
Optional base ring included
8 7/8" fill height from deck to spout outlet
Total height 13 1/4"
.50 GPM maximum flow rate for hot water
1.30 GPM maximum flow rate for cold (not chilled) water
Maximum counter thickness 2 1/4"
Minimum install hole diameter 1 3/8"
Compatible with reverse osmosis filtration systems
Limited Lifetime Mechanical and Finish Warranty
For use with Water Filtration System* (included)
For use with Ideal Hot Water Tank™ (included)
*Note: May reduce water flow



Ideal Hot Water Tank™
(Included)



Ideal Hot Water Tank

Digital control touch panel
Adjustable temperature settings = 3° increments
Seven preset temperatures = 167°-208°F
Digital temperature control within 1-2°
On/off button with vacation mode feature
1500 watt/120-volt ceramic encased rapid-recovery element
60 cups per hour capacity
Standby reheat feature with low energy consumption 1W
Standby reheat at 6° temperature-drop
Built-in dry Burn and overheat sensors
Built-in 60 psi RV with patented Baffle Fill System
Encased element prevents limescale build-up
Double venturi reduces faucet "dripping/spitting"
Compatible with reverse osmosis filtration systems
Space-saving 7 1/2" W x 7 1/2" D x 10 3/4" H
Cabinet-side or floor-mount install options
Parts Included: Silicone Washers, Adapters

Construction

Ideal Hot & Cold Tap


Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

Ideal Hot Water Tank

304 stainless steel tank 0.6 USG (2.4 litres)
Five Year Warranty

Water Filtration System

Five Year Warranty
Made in the USA

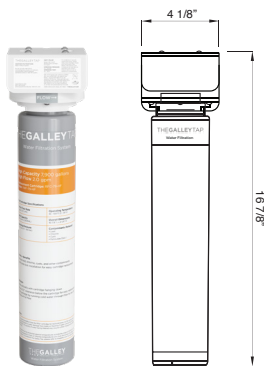

Water Filtration System
(Included)

Water Filtration System

Service flow rate 2.0 gpm
Rated capacity 7,900 gallons
Operating pressure 10 - 125 psi
Operating temperature 35 - 100°F
Overall dimensions 16 7/8" x 4 1/8"
Reduces lead, chlorine, cysts and other contaminants
Quick twist-lock cartridge replacement
Replacement filter cartridge dimensions 14 1/2" x 3"
Internal parts never exposed to human handling
Filtration protects capital equipment from early breakdown
Installs vertically (allow 2 1/2" clearance)
Parts Included: Mounting bracket and screws, plastic tubing, push-fit Tee

Codes/Standards

Ideal Hot & Cold Tap

ASME 112.18.1
CSA B125.1
CALGreen
cUPC *In Progress*
NPC
ADA

Ideal Hot Water Tank

UL Certified

Water Filtration System

IAPMO Certified
NSF/ANSI 42, 53, 372

