



Ideal Pot Filler Tap with Filtration Available Late 2021

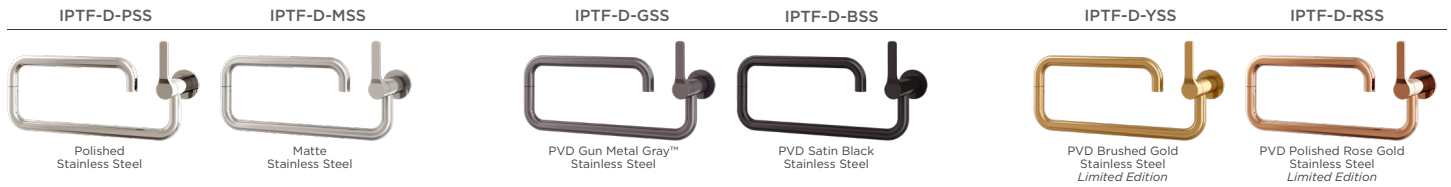

Specifications

Ideal Pot Filler Tap

Single-lever control
1/4 turn ceramic disc valve cartridge
COMFORTFEEL™ lever handle
Cold water valve, one inlet
Rough-in part required (sold separately)
Laminar Ideal Flow®
Dual swivel spout
24" projection
3.2 GPM
For use with Water Filtration System* (included)
*Note: May reduce water flow

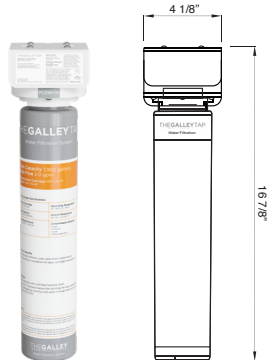

Water Filtration System
(Included)

Water Filtration System

Service flow rate 2.0 gpm
Rated capacity 7,900 gallons
Operating pressure 10 - 125 psi
Operating temperature 35 - 100°F
Overall dimensions 16 7/8" x 4 1/8"
Reduces lead, chlorine, cysts and other contaminants
Quick twist-lock cartridge replacement
Replacement filter cartridge dimensions 14 1/2" x 3"
Internal parts never exposed to human handling
Filtration protects capital equipment from early breakdown
Installs vertically (allow 2 1/2" clearance)
Parts Included: Mounting bracket and screws, plastic tubing, push-fit Tee

Construction

Ideal Pot Filler Tap

Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

Water Filtration System

Five Year Warranty
Made in the USA

Codes/Standards

Ideal Pot Filler Tap

NSF Pending
UPC Pending

Water Filtration System

IAPMO Certified
NSF/ANSI 42, 53, 372

Rough-in



PFT-RO-SS

Required Rough-in Part

